


# 山田ため池 測定結果



凡 例	
<span style="border: 1px solid red; display: inline-block; width: 15px; height: 10px;"></span>	対 策 範 囲
<span style="background-color: #90EE90; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span>	浚 渫 施 工
<span style="background-color: #FFFF00; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span>	掘 削 施 工
<span style="background-color: #FF69B4; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span>	品 質 管 理 点

池名	品質管理地点	対策前	対策後	低減率
		( <sup>134</sup> Cs, <sup>137</sup> Cs合算) Bq/kg(dry)	( <sup>134</sup> Cs, <sup>137</sup> Cs合算) Bq/kg(dry)	
山田ため池	1	29,057	769	97.4%
	2	27,364	116	99.6%
	3	28,287	58	99.8%
	4	57,363	536	99.1%
	5	15,992	48	99.7%
	6	13,246	39	99.7%
	7	70,298	240	99.7%
	8	21,755	1,353	93.8%
	9	28,780	896	#REF!
	10	20,257	93	99.5%
	11	12,407	1,764	85.8%
	12	12,189	627	94.9%
	13	15,678	207	98.7%
	14	11,923	1,643	86.2%
	15	9,146	844	90.8%
	16	18,214	104	99.4%
	17	11,344	52	99.5%
	18	17,710	62	99.6%
	19	15,752	3,998	74.6%
	20	29,869	332	98.9%
	21	13,132	102	99.2%
	22	27,301	5,646	79.3%
	23	26,261	2,130	91.9%
	24	12,799	6,772	47.1%
	25	32,696	547	98.3%
	26	21,611	141	99.3%
	27	27,838	60	99.8%
	28	21,311	1,643	92.3%
	29	32,715	2,914	91.1%
	30	32,309	160	99.5%
	31	22,756	200	99.1%
	平均	23,786	1,100	95.4%

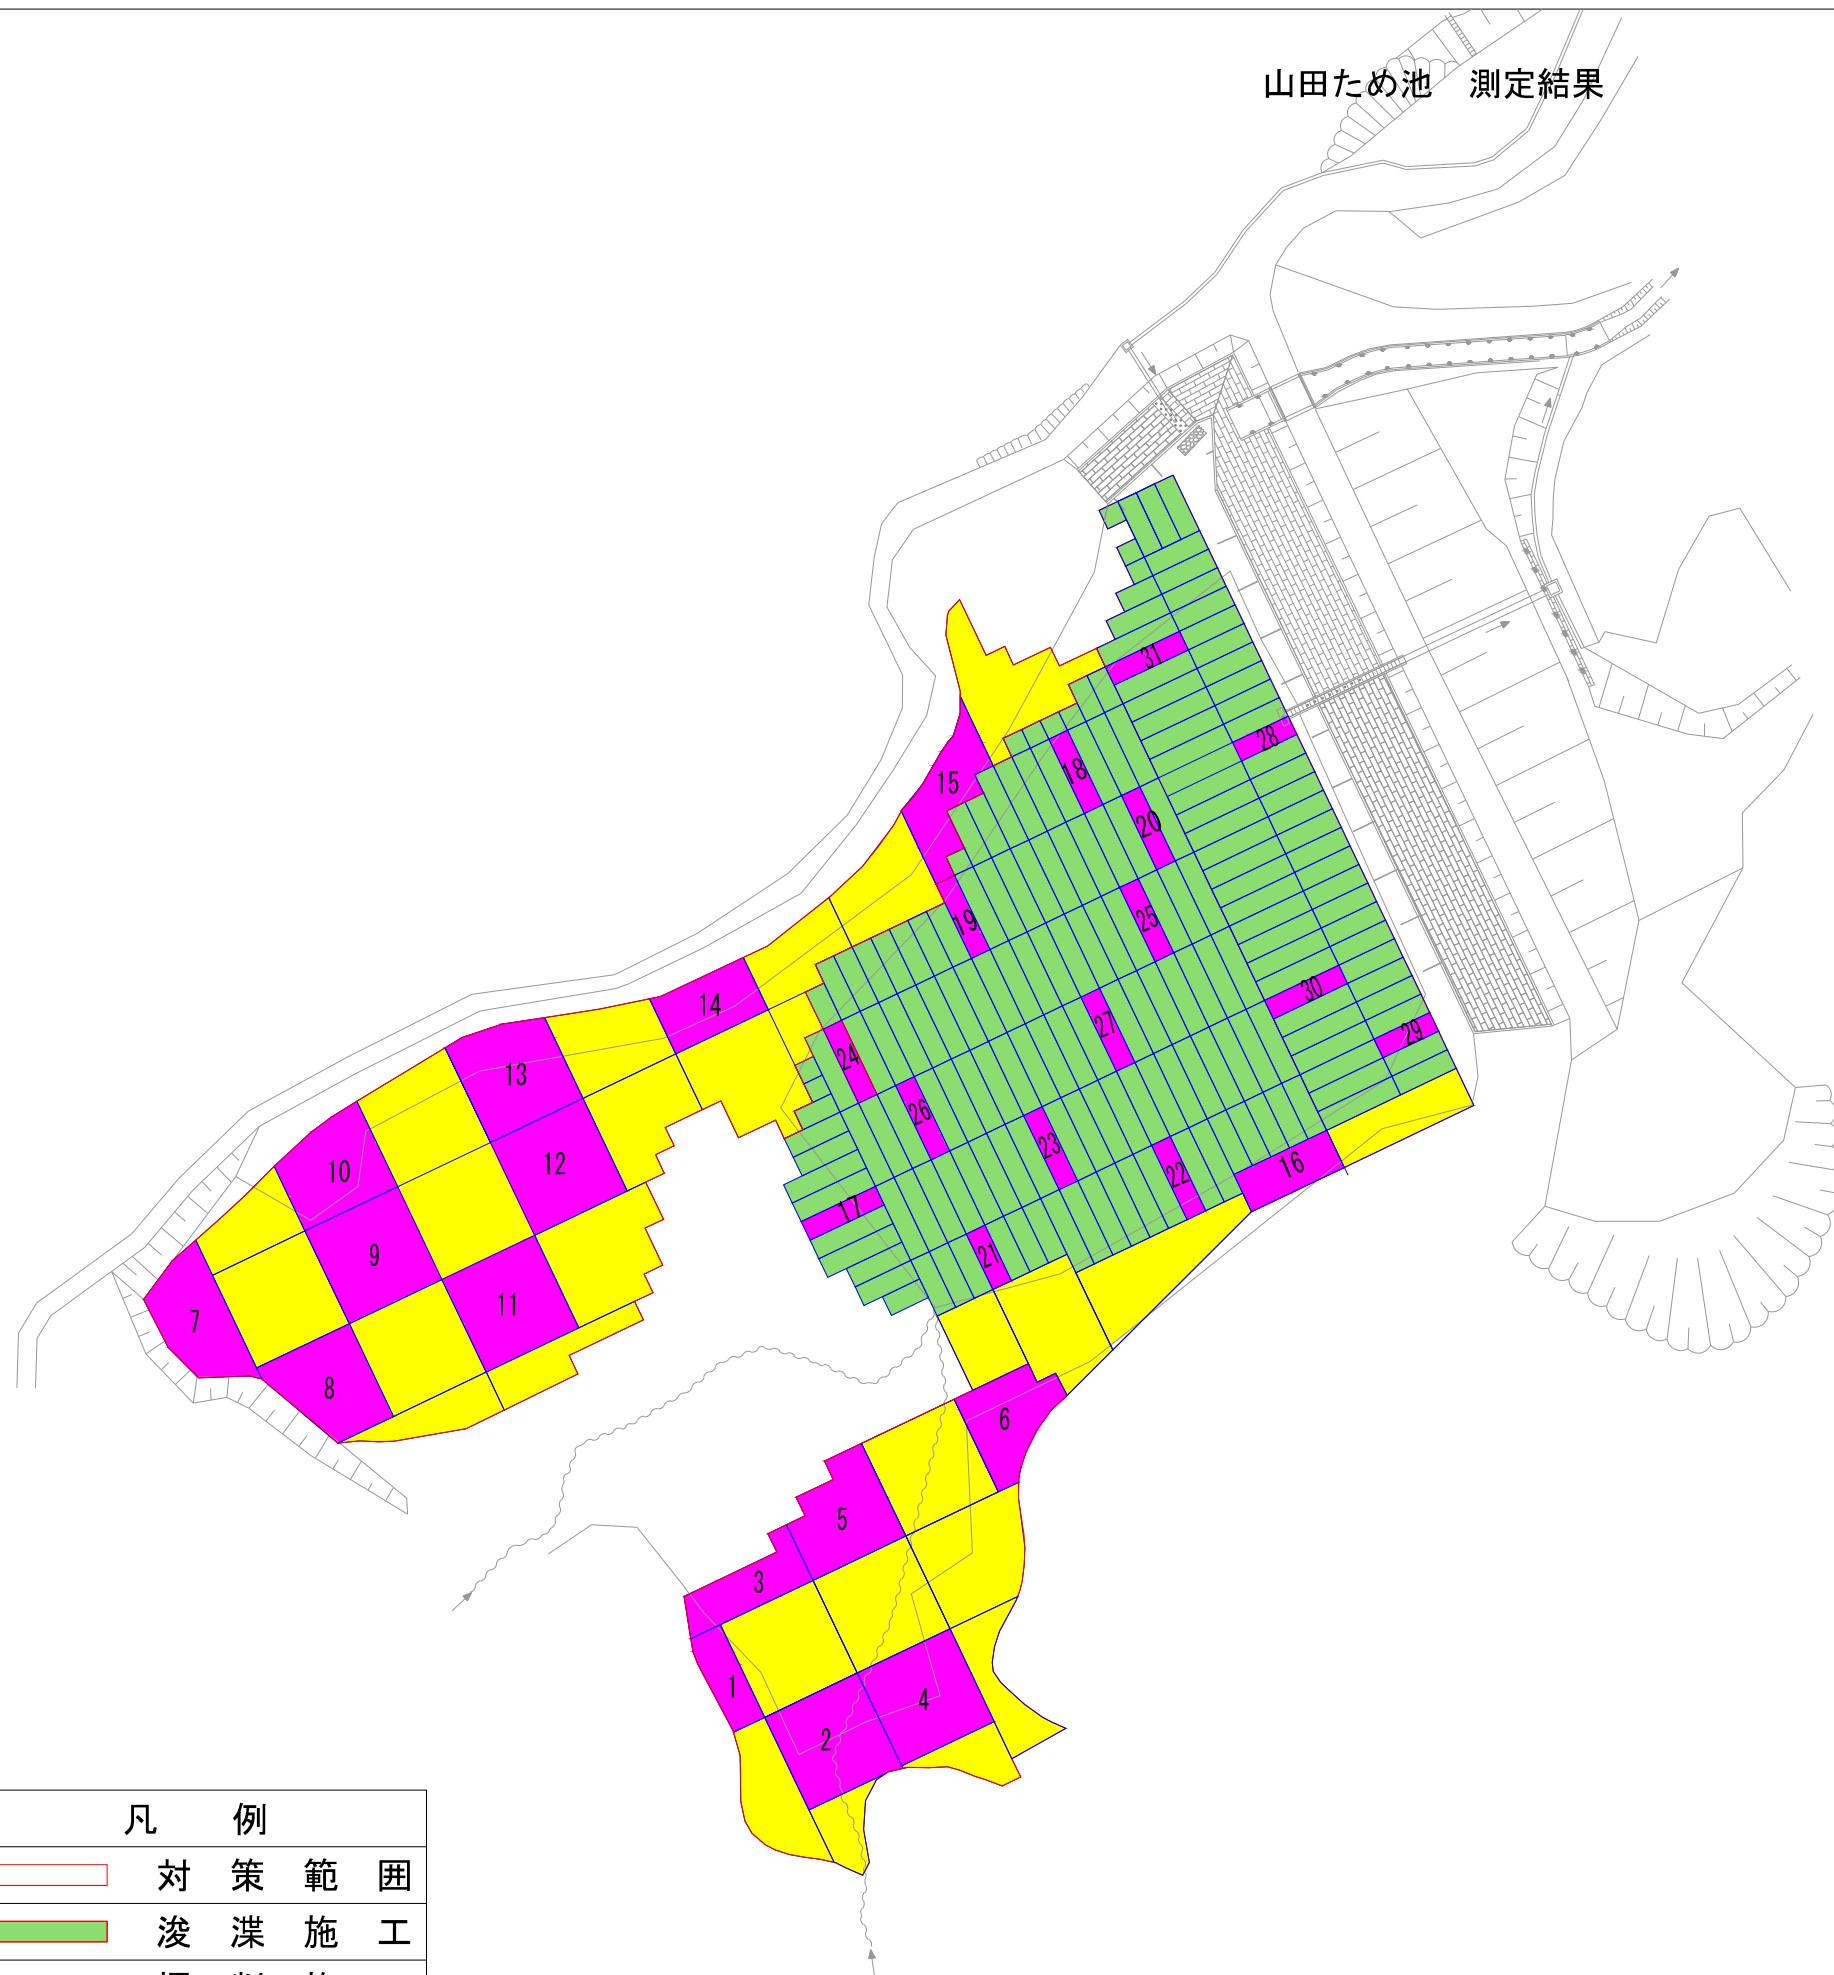