



丈六ため池(再対策) 測定結果

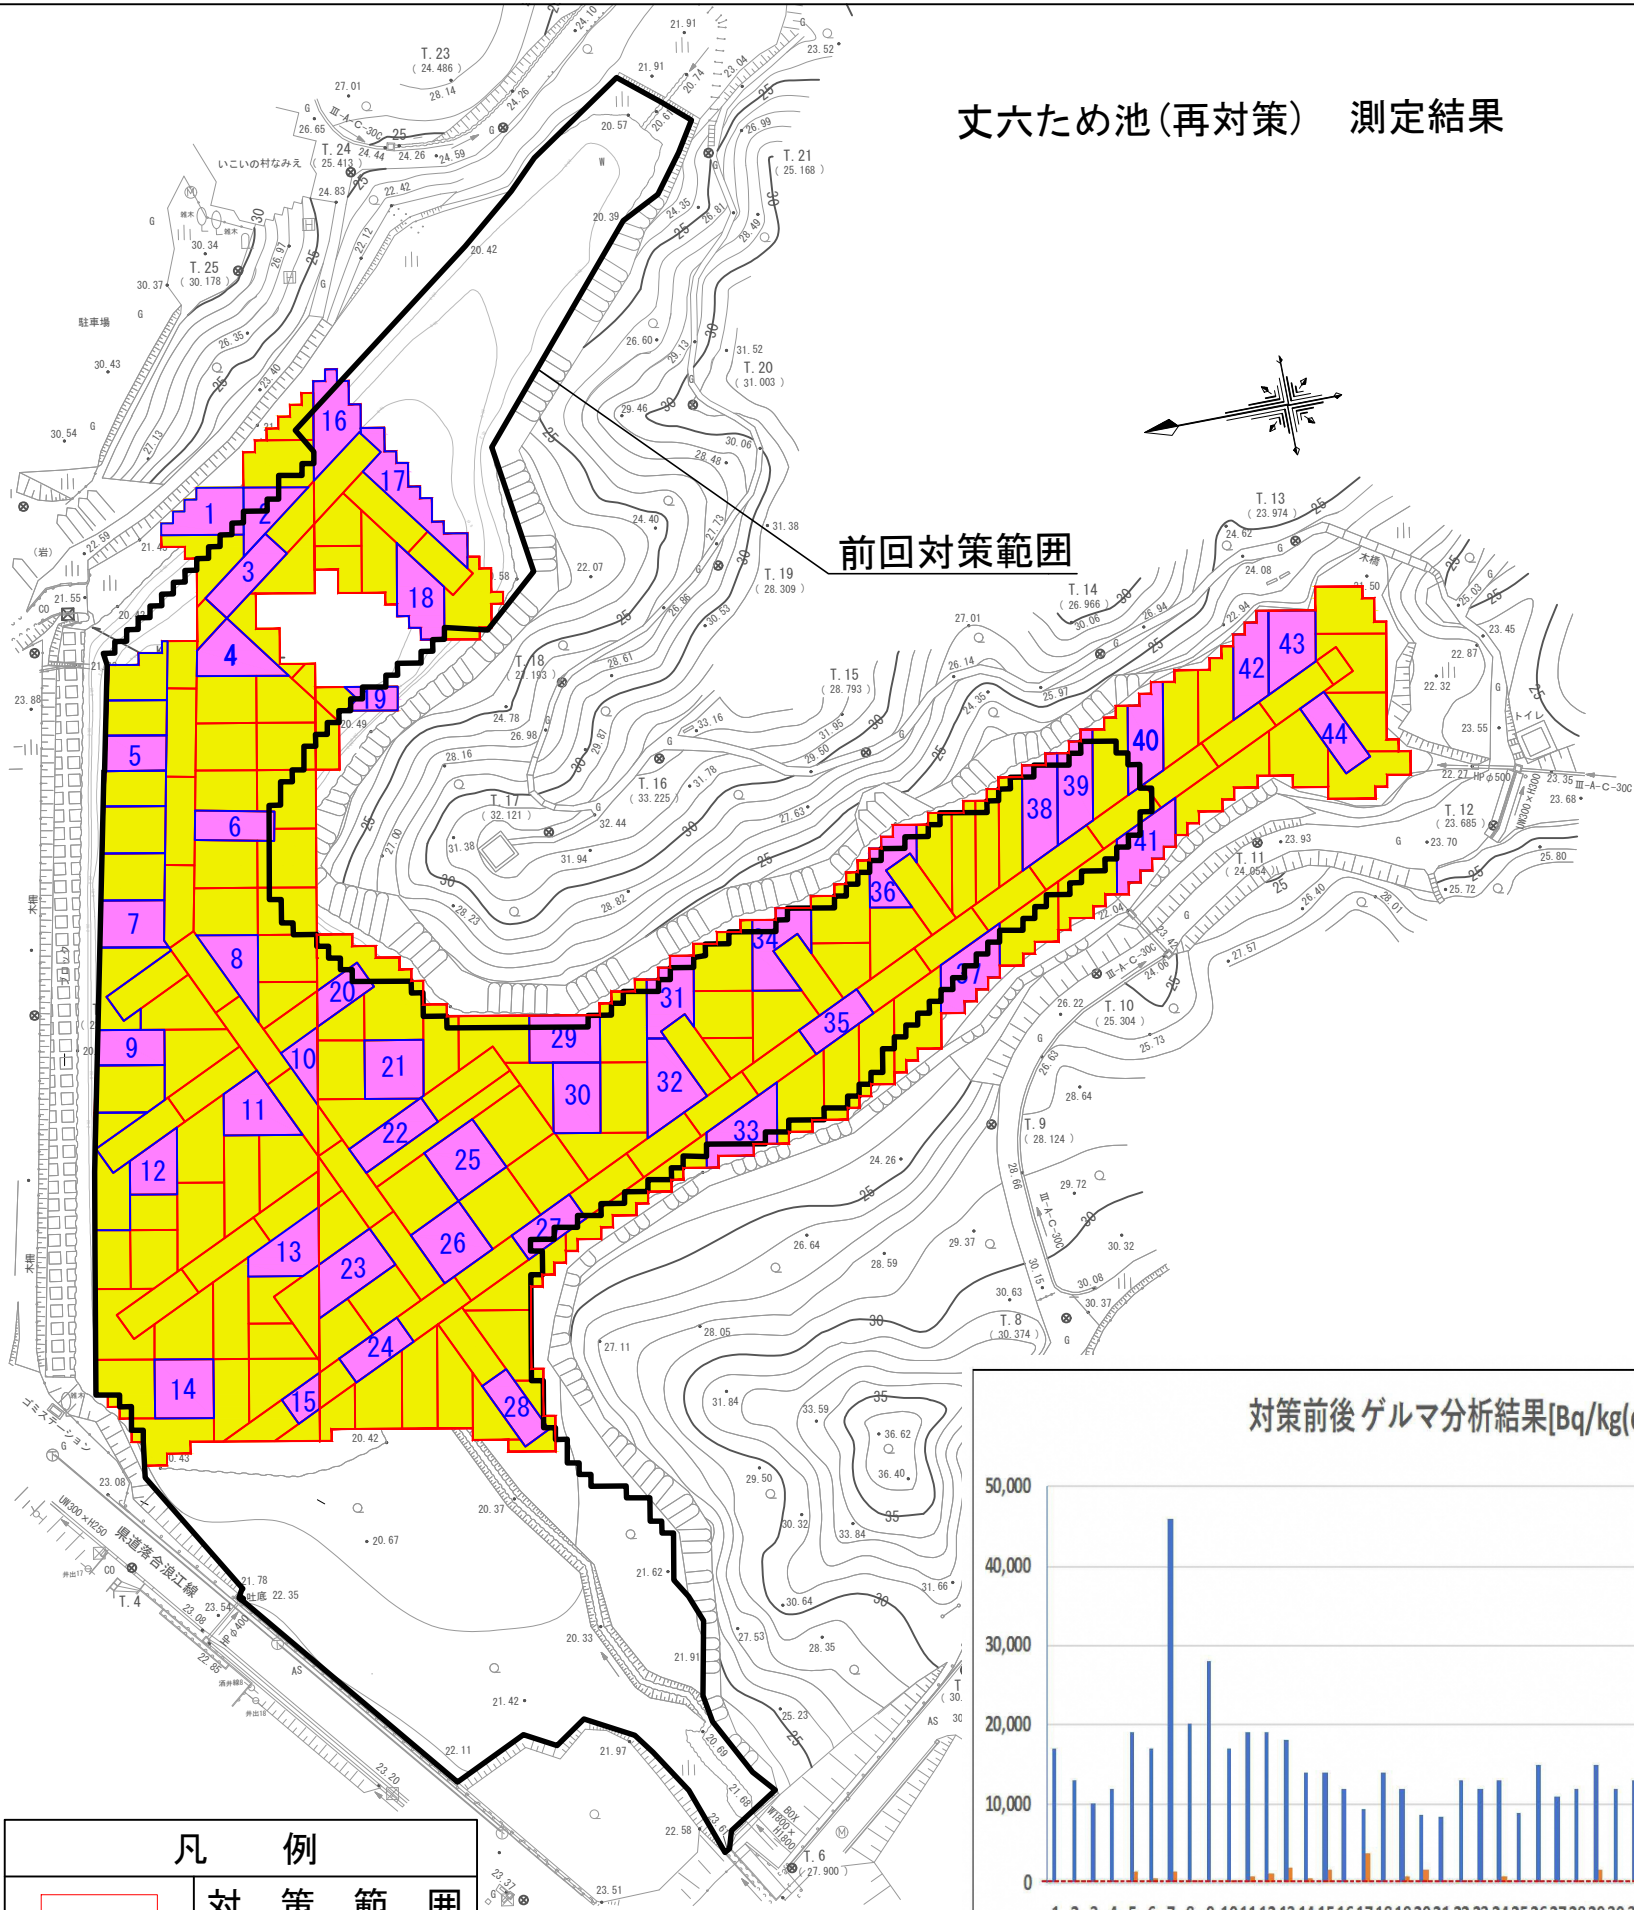

凡 例	
	対 策 範 囲
	掘 削 施 工
	品 質 管 理 点

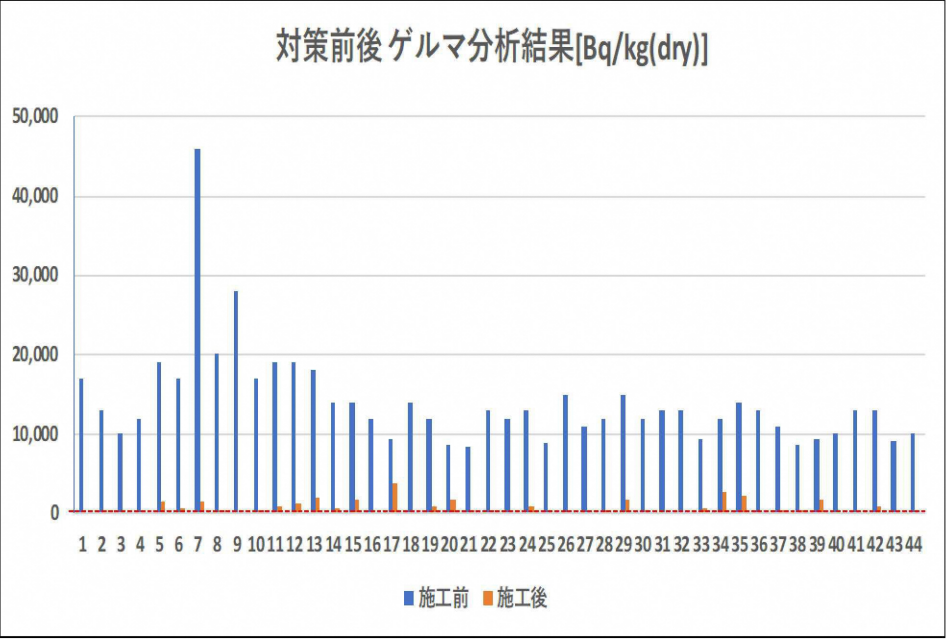

池名		品質管理地点	対策前 (¹³⁴ Cs, ¹³⁷ Cs合算)	対策後 (¹³⁴ Cs, ¹³⁷ Cs合算)	低減率
			Bq/kg(dry)	Bq/kg(dry)	
丈六ため池	(掘削)	1	17,000	検出下限値以下	99.8%
		2	13,000	410	96.8%
		3	10,000	260	97.4%
		4	12,000	200	98.3%
		5	19,000	1,500	92.1%
		6	17,000	540	96.8%
		7	46,000	1,500	96.7%
		8	20,000	310	98.5%
		9	28,000	48	99.8%
		10	17,000	440	97.4%
		11	19,000	850	95.5%
		12	19,000	1,200	93.7%
		13	18,000	1,900	89.4%
		14	14,000	530	96.2%
		15	14,000	1,800	87.1%
		16	12,000	55	99.5%
		17	9,400	3,700	60.6%
		18	14,000	250	98.2%
		19	12,000	880	92.7%
		20	8,500	1,800	78.8%
		21	8,200	290	96.5%
		22	13,000	検出下限値以下	99.7%
		23	12,000	59	99.5%
		24	13,000	940	92.8%
		25	8,800	41	99.5%
		26	15,000	410	97.3%
		27	11,000	70	99.4%
		28	12,000	360	97.0%
		29	15,000	1,800	88.0%
		30	12,000	490	95.9%
		31	13,000	検出下限値以下	99.8%
		32	13,000	49	99.6%
		33	9,400	650	93.1%
		34	12,000	2,700	77.5%
		35	14,000	2,100	85.0%
		36	13,000	80	99.4%
		37	11,000	280	97.5%
		38	8,500	320	96.2%
		39	9,300	1,600	82.8%
		40	10,000	230	97.7%
		41	13,000	検出下限値以下	99.8%
		42	13,000	1,000	92.3%
		43	9,000	61	99.3%
		44	10,000	66	99.3%
		平均	14,025	725	94.8%

※検出下限値＝40Bq/kg